



# Scotchcast™ Electrical Resin 8

Two-Part, Room-Curing, Semiflexible, Unfilled, Epoxy Liquid Resin

## Data Sheet

### Product Description

3M™ Scotchcast™ Electrical Resin 8 is a low-stress, highly moisture-resistant compound that cures at room temperature. This epoxy resin system offers long pot life, low viscosity, a 1:1 mix ratio (by weight), Class B (130°C) temperature rating, and is commonly used to coat printed circuit boards, pot connectors, and impregnate electrical and electronic components. Because of its low exotherm, resin 8 is also frequently specified for impregnating and encapsulating temperature sensitive units.

- Low exotherm
- High moisture resistance
- Highly resistant to mechanical and thermal shock
- Extended pot life

### Handling Properties

Mix Ratio (A:B)	Wt 1:1
	Vol (%) 46:54
Viscosity	A = 12,500 cps
@ 23°C (73°F)	B = 4,000 cps
	Mixed = 7,000 cps
Density	A = 1.160 kg/l (9.7 lbs/gal)
	B = 0.995 kg/l (8.3 lbs/gal)
Flash Point	A = 204°C (400°F)
	B = 201°C (395°F)
Gel Time	30 min. @ 60°C (140°F)
Curing Guide	23°C (75°F) 24-48 hrs
	60°C (140°F) 2 hrs
	95°C (203°F) 1 hr

### Test Methods

<sup>1</sup> Fed. Std. No. 406, Method 1021	<sup>6</sup> MIL-I-16923G
<sup>2</sup> Fed. Std. No. 406, Method 1011	<sup>7</sup> Fed. Std. No. 406, Method 4021
<sup>3</sup> Fed. Std. No. 406, Method 1031	<sup>8</sup> Fed. Std. No. 406, Method 4041
<sup>4</sup> MIL-I-16923E	<sup>9</sup> Fed. Std. No. 406, Method 4031
<sup>5</sup> 3M Test Method	

### Typical Data/Physical Properties

Property	Value
<b>Color</b>	Clear Amber
<b>Hardness (Shore D)</b>	68
<b>Specific Gravity</b>	1.12
<b>Compressive Strength<sup>1</sup></b>	700 psi
10% Compression	(49 kg/cm <sup>2</sup> )
<b>Tensile Strength<sup>2</sup></b>	1700 psi
Ultimate	(120 kg/cm <sup>2</sup> )
<b>Elongation<sup>2</sup> (% at break)</b>	75
<b>Flexural Strength<sup>3</sup></b>	875 psi
	(62 kg/cm <sup>3</sup> )
<b>Thermal Conductivity<sup>4</sup></b>	4.2 x 10 <sup>-4</sup>
(Cal/sec/cm <sup>2</sup> /°C/cm)	
<b>Linear Thermal Expansion<sup>4</sup></b>	15 x 10 <sup>-5</sup>
(length/unit length/°C)	
<b>Thermal Shock<sup>4</sup></b>	Pass
<b>Thermal Shock<sup>6</sup></b>	
10 cycles - 55 to 130°C 1/8" (3.175 mm) Olyphant	Pass
<b>Electric Strength<sup>9</sup></b>	325 V/mil
<b>Mechanical Shock<sup>4</sup></b>	7.75
Ball Drop (lbs.)	(3.5 kg)
<b>Moisture Absorption<sup>4</sup></b>	
% weight increase, 240 hrs. @ 96% R.H.	1.6
<b>Thermal Aging</b>	
% weight loss	
10 days @ 105°C	1.5
1000 hrs. @ 130°C	9.2
1000 hrs. @ 155°C	12.2
<b>Boiling Water Resistance</b>	
7 days	
- % weight gain	3.6
- Hardness Change (Shore D)	60
<b>Hydrolytic Stability<sup>6</sup></b>	
120 days 71°C (160°F) 95% R.H. (Hardness Loss %)	13
<b>Dielectric Constant<sup>7</sup></b>	
900 Hz 23°C	4.4
<b>Dissipation Factor<sup>7</sup></b>	
1000 Hz 23°C	0.09
<b>Volume Resistivity<sup>8</sup></b>	
23°C (ohm-cm)	10 <sup>13</sup>

**Note:** These are typical values and should not be used for specification purposes.

## Usage Information

### Mixing

Mix the separate parts before removing them from their containers. They may be warmed to 60°C (140°F) to aid mixing. (Gel time is approximately 30 minutes @ 60°C). Thoroughly mix parts A and B in the correct proportions. Mix until the color is absolutely uniform and a homogeneous mixture is obtained.

### Deaerating

Air introduced during mixing can be removed by evacuating at 5 to 10 mm of mercury (Hg) absolute pressure. The 3M™ Scotchcast™ Electrical Resin can be warmed to aid air removal. The container side wall should be four times the height of liquid resin to contain the foaming that takes place under vacuum.

### Casting and Impregnating


Pour the warm resin into the preheated 100°C (212°F) mold. If no mold is used, dip the preheated part into the resin. Heating the part, resin and mold aids impregnation. For maximum impregnation, evacuate at 5 mm mercury (Hg) absolute pressure, or pour under vacuum and hold for several minutes before releasing.

### Curing

Where minimum stress and maximum thermal shock resistance are required, the ambient temperature cure cycle is suggested. (See “Curing Guide” of **Handling Properties** section). If an oven cure is used, time should be added to the cure cycle to allow the resin to reach the curing temperature. Cure using cycles shown under Handling Properties. Where higher temperatures are not objectionable and the size of the casting not excessive, the resin can be quick-cured in one hour at 95°C (203°F).

### Storage


Both parts of this resin system should be stored at temperatures between 20 to 30 degrees Celsius, and 30% to 60% relative humidity. When not in use, containers should be kept tightly closed. Storage at conditions outside those suggested may compromise the performance of the resin.

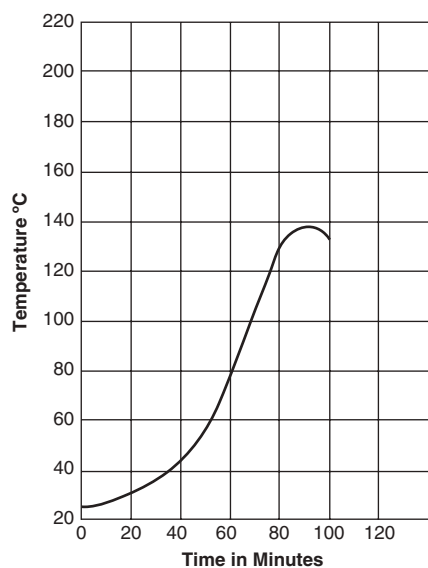

Exothermic Heat Rise for 1 lb. Sample

## Handling and Safety Precautions


Read all Health Hazard, Precautionary and First Aid statements found in the Material Safety Data Sheet (MSDS) and/or product label of chemicals prior to handling and use.

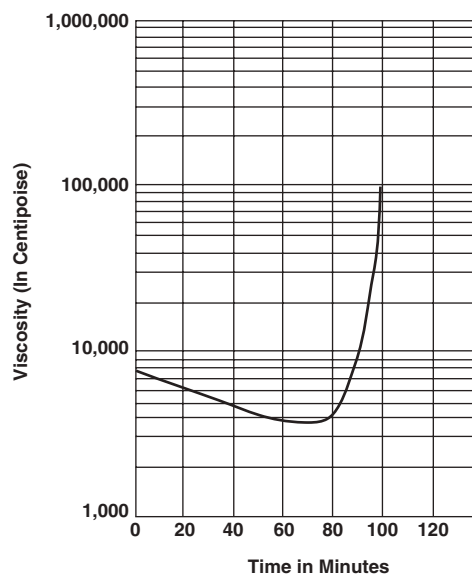

Brookfield Viscosity vs Time @ 73°F (23°C) 130 gram sample


### Dielectric Constant

Fed. Std. No. 406, Method 4021  
(Test Frequencies in Hertz)

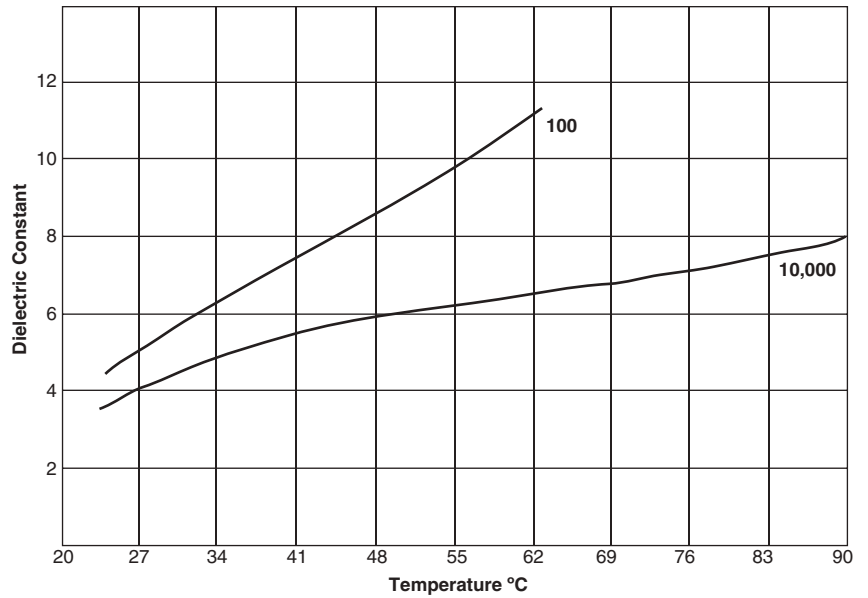


### Dissipation Factor %

Fed. Std. No. 406, Method 4021  
(Test Frequencies in Hertz)

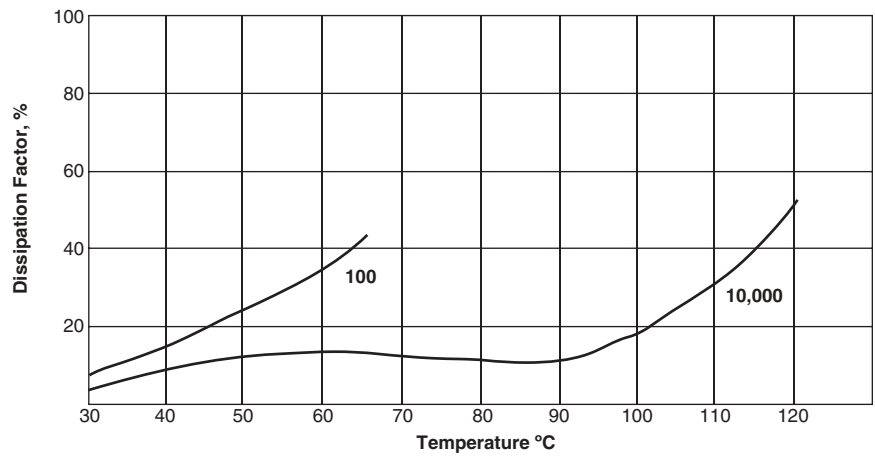

### Volume Resistivity (ohm-cm)

Fed. Std. No. 406, Method 4041

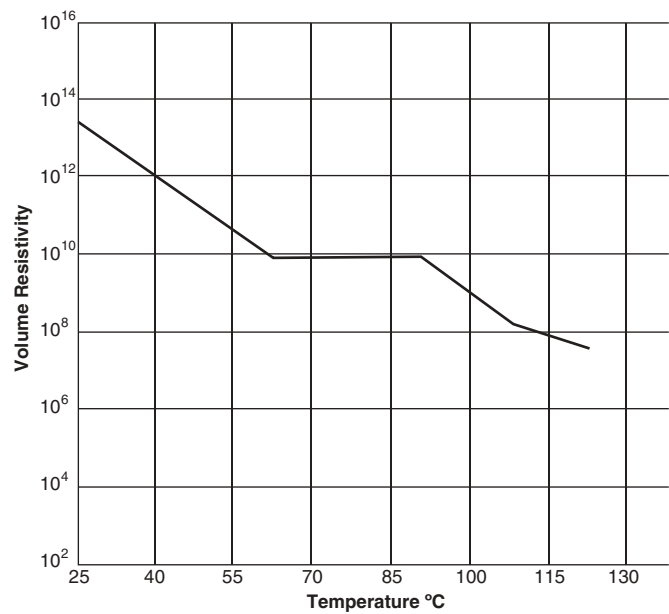

3M and Scotchcast are trademarks of 3M Company.

#### Important Notice

All statements, technical information, and recommendations related to 3M's products are based on information believed to be reliable, but the accuracy or completeness is not guaranteed. Before using this product, you must evaluate it and determine if it is suitable for your intended application. You assume all risks and liability associated with such use. Any statements related to the product which are not contained in 3M's current publications, or any contrary statements contained on your purchase order shall have no force or effect unless expressly agreed upon, in writing, by an authorized officer of 3M.

**Warranty; Limited Remedy; Limited Liability.** This product will be free from defects in material and manufacture for a period of one (1) year from the date of purchase. **3M MAKES NO OTHER WARRANTIES INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** If this product is defective within the warranty period stated above, your exclusive remedy shall be, at 3M's option, to replace or repair the 3M product or refund the purchase price of the 3M product. Except where prohibited by law, **3M will not be liable for any loss or damage arising from this 3M product, whether direct, indirect, special, incidental or consequential regardless of the legal theory asserted.**



#### Electrical Markets Division

6801 River Place Blvd.  
Austin, TX 78726-9000  
800/676-8381  
Fax: 800/828-9329  
[www.3M.com/electrical/oem](http://www.3M.com/electrical/oem)



*Printed on 50% recycled paper  
with 10% post-consumer*

Litho in USA  
© 3M 2004 78-8124-5589-3-B